



GENERATOR

Prime power: kVA/kW	80/64	Base fuel tank running: hrs	25
Standby power: kVA/kW	88/70	Fuel tank capacity: L	540
Phase	3	Structure Type	R
Voltage: V	415	Dry weight: Kg	2100
Ampage: A	111.2	Dimensions: LxWxH	3162 x 1174 x 1974

ENGINE

Brand	Cummins	Intake system	Turbo charged
Model	6BT5.9-G1	Injection type	Direct
Cylinders	6	Cooling system	Water cooled
Displacement: L	5.9	Battery: V	12/24
Bore: mm	102	Fuel tank capacity: L	540
Stroke: mm	120	Coolant capacity: L	29.7
Compression ratio	16.8	Oil capacity: L	14.2
Rated rpm	1500	Air filter	Dry
Engine governor	Mechanical	Noise level @ 7m: dBA	(100% load) 69.0
Standby power: kW	92	Fuel consumption:	---
Prime power: kW	86	50% Load: L/H	11
		100% Load: L/H	22

ALTERNATOR

Brand	Stamford	Voltage: V	415
Model	UCI224G	Ampage: A	111.2
Exciter	Brushless	Frequency: Hz	50
Terminals	12	Phase	3
Drip proof	IP23	A.V.R model	AS440
Overspeed: rpm	2250		

KEY FEATURES

- ABB main circuit breaker: 125 A
- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- Lockable battery isolator switch
- All access/control panel doors lockable
- Heavy duty powder coated canopy
- Drain points for fuel/radiator/engine/base
- Remote run connector
- Deep Sea Electronics: DSE- 7420
- 2x 12V/70AH sealed for life maintenance free battery
- Sound attenuated enclosure
- Vibration isolators between engine/ alternator/base
- Steel base frame with forklifts/drag slots
- Single or dual pick-up centre hitch point
- Analog and digital fuel gauges
- 50°C radiator
- Oil pump on the engine
- Base fuel tank for 25 hrs running
- Breather valve for fuel tank
- Operations manual/specifications



Enclosed power outlet, terminal and sockets



Superior engine



Control switch for easy maintenance




Radiator protection cover



Forklift channel



Deep Sea controller



Double-layer fuel tank



Fuel inlet

ENVIRONMENTAL OPERATING CONDITIONS

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C.
- Humidity: Less 90%.
- Altitude: Below one thousand (1000) meters above sea level.

MOTIVE GROUP CAPABILTIES INCLUDE

- Service
- Repairs
- PLC Management
- Fabrication
- Installations
- Commissioning
- Project Consultations
- Earthworks
- Civil Construction
- Engineering services
  - Electrical
  - Mechanical
  - Civil
- Hybrid Micro Grids
- CNG (Compressed Natural Gas)
- LPG (Liquefied Petroleum Gas)
- Cogeneration/CHP



Field Service Maintenance | Power Systems

Sales. Service.

E. sales@motivegroup.com.au

T. (03) 9037 4328

W. motivegroup.com.au




DESIGN STANDARDS



The designs and the productions are in conformity with:

- Conformance Européenne (CE)
- China Compulsary Certification (CCC)
- ISO8528-5:2005
- GB/T2820.5-2009
- AS 3000-2018
- AS 3010.1-2017


Dry weight	2100 KG
Fuel tank capacity	540 L
Dimensions L x W x H	3162x1174x1974 mm

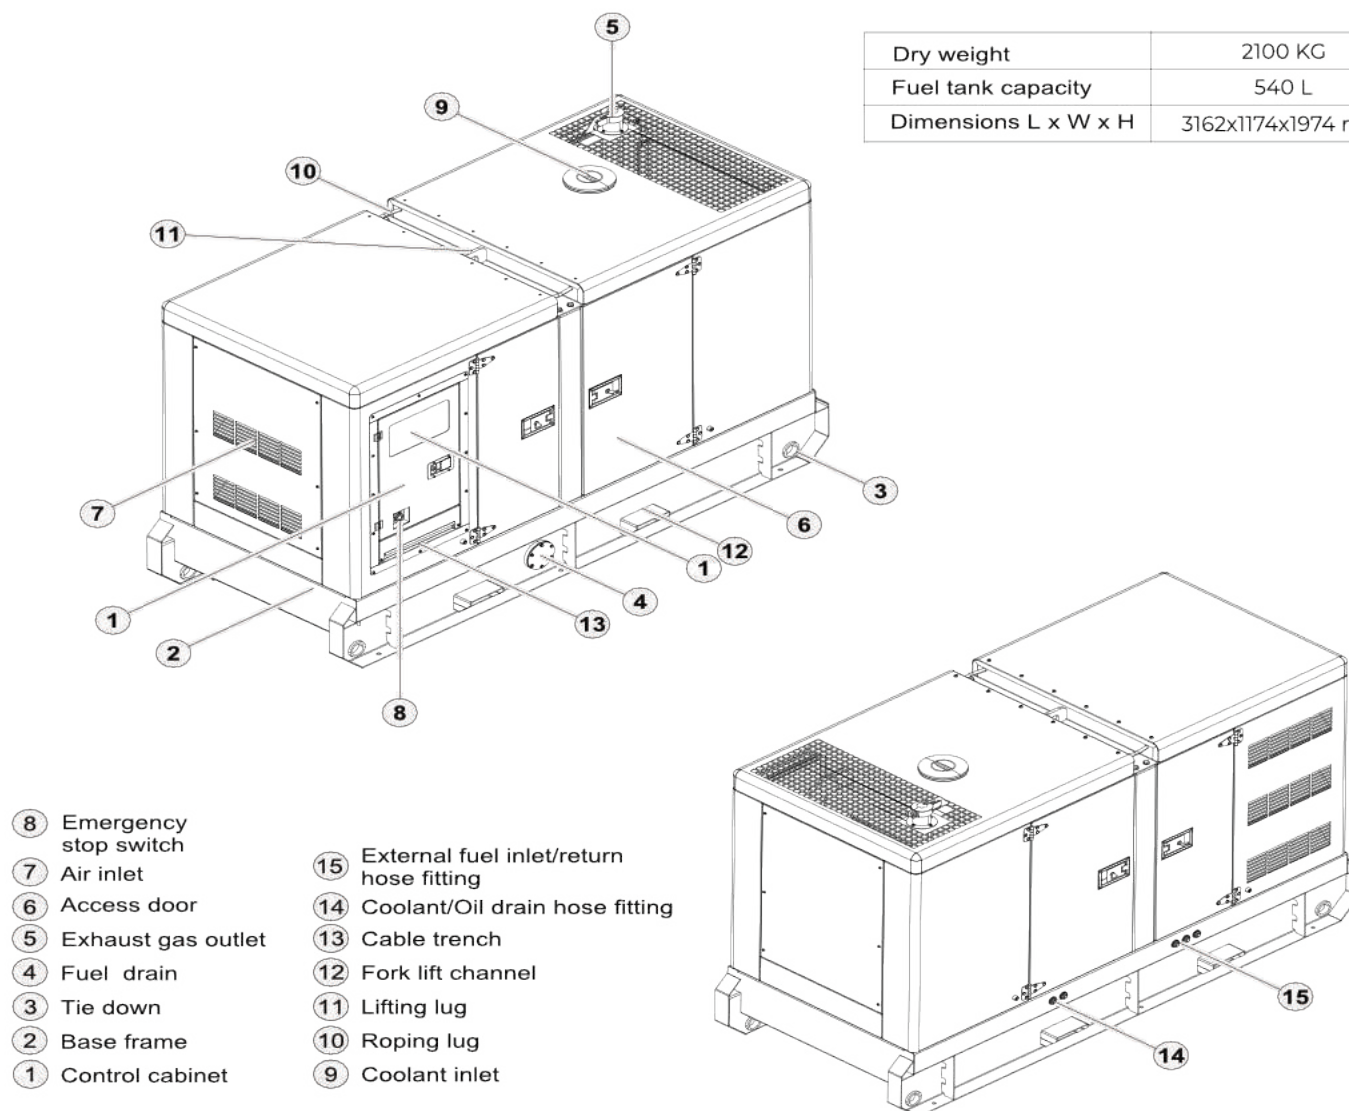

- 8 Emergency stop switch
- 7 Air inlet
- 6 Access door
- 5 Exhaust gas outlet
- 4 Fuel drain
- 3 Tie down
- 2 Base frame
- 1 Control cabinet
- 15 External fuel inlet/return hose fitting
- 14 Coolant/Oil drain hose fitting
- 13 Cable trench
- 12 Fork lift channel
- 11 Lifting lug
- 10 Roping lug
- 9 Coolant inlet

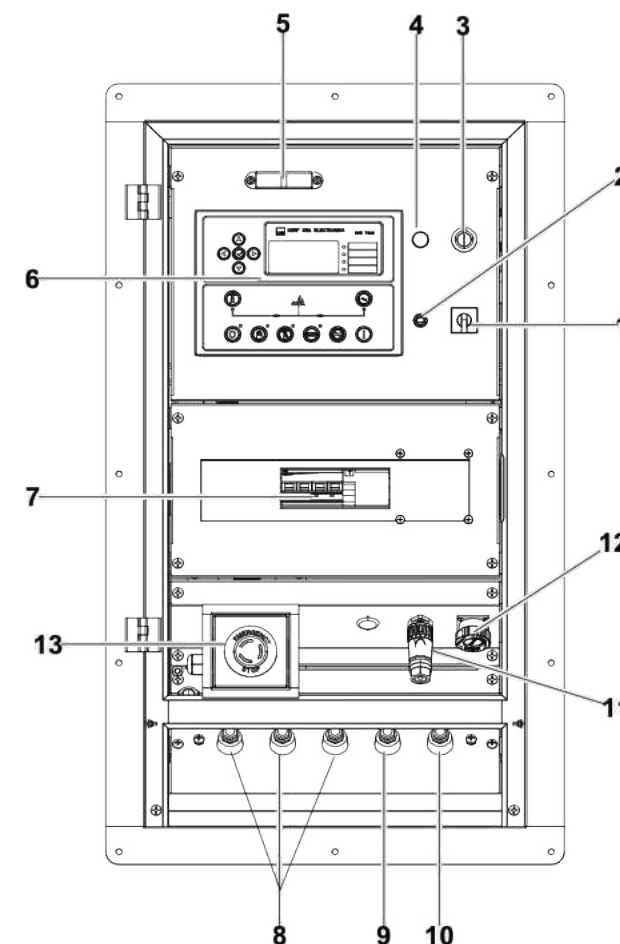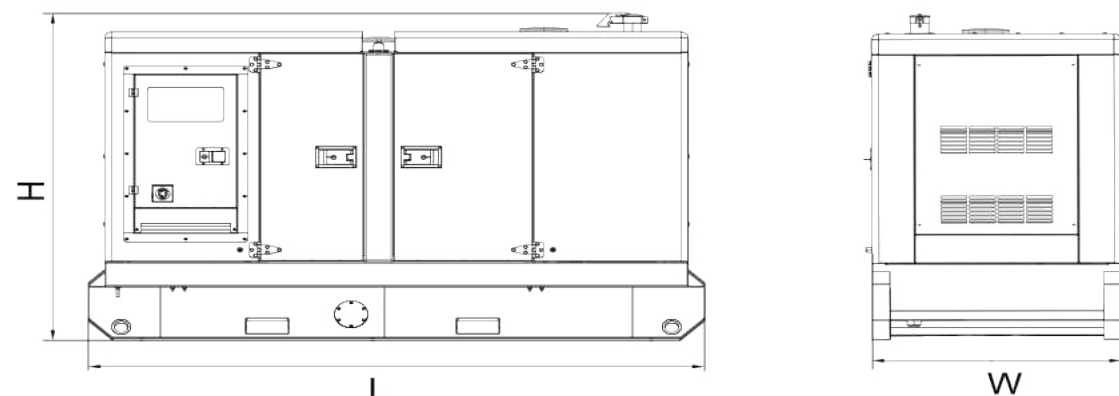

Control & Field wiring cabinet

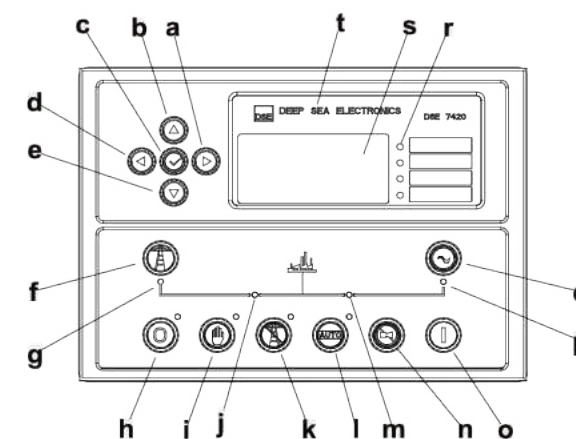

Control Panel

Ref.	Description
1	Control cabinet lamp switch
2	Mains input changeover switch
3	Key switch
4	Charge indicator
5	Control cabinet lamp
6	Control module
7	Main circuit breaker
8	Live wire terminals
9	Neutral wire terminal
10	Ground wire terminal
11	Remote communication interface
12	ATS communication interface
13	Emergency stop switch

a	Button (next page)
b	Button (increase value / previous item)
c	Button (accept)
d	Button (previous page)
e	Button (decrease value / next item)
f	Button (transfer the load to the mains supply, when in Manual mode only)
g	Mains supply available LED
h	Stop / Reset button
i	Manual button (Manual control mode)
j	Mains supply on load LED
k	Test button (Test mode)
l	Auto button (Auto mode)
m	Genset on load LED
n	Mute/Lamp test button
o	Start button (Manual)
p	Genset available LED
q	Button (transfer the load to the genset, when in Manual mode only)
r	Alarm LED (4 alarm items)
s	LCD display
t	Control module name

Standby rating: These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. Overload will not be permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3). Prime rating: These ratings are applicable for supplying continuous electrical power (at variable load) instead of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1-12 hours. Standard Reference Conditions: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L 30% relative humidity. Fuel consumption data at full load with diesel fuel, with specific gravity of .85 and conforming to BS2869-1998, Class A2. Note kVA ratings subject to ambient temperature/altitude/site conditions. Engine kW rating may vary +/- 3%. Designed to comply with Australian and European Standards. All of Motive Group Pty Ltd's diesel generators come with a standard 12month/2000hr manufacturers warranty. \*T&C's apply.